

FORTIS

STRONG MOTION ACCELEROMETER



Designed to be 'best in class', our most versatile accelerometer yet.

KEY FEATURES

- > Slimline design
- > Switchable gain
- > Easy, rapid deployment
- > Also available with waterproof, stainless steel casing for posthole deployment

APPLICATIONS

- > Earthquake early warning systems
- > Structural health monitoring
- > Shake intensity research

Fortis

The Güralp Fortis is a strong motion analogue accelerometer with an innovative, slim-line design for fast installation in any environment.



FORTIS AT ACTUAL SIZE
(125 MM DIAMETER)

THE FORTIS IS ALSO
AVAILABLE IN A
STAINLESS STEEL CASING
SUITABLE FOR POSTHOLE
DEPLOYMENT*



*GAIN IS CONTROLLABLE REMOTELY
VIA THE GÜRALP MINIMUS DIGITISER

Our state-of-the-art gain switch allows the instrument to perform optimally in a wide range of earthquake shaking scenarios providing versatility for all earthquake early warning and structural health monitoring applications.

The Güralp Fortis is a very low-noise, force-feedback accelerometer with a large dynamic range, suitable for seismology, hazard mitigation and civil engineering applications.

The Fortis has one output which can be set at a wide range of gain options, providing flexibility for all strong motion monitoring applications.

The system has both a flat response to ground acceleration from DC to 100 Hz and a stable phase response within the passband.

Key features

Very low-noise components for high precision and enhanced dynamic range

Fixing bolt allows rapid installation for structural health monitoring

Slimline shape

Switchable gain from 0.5 to 4.0 g controllable manually on the sensor or remotely using the Güralp Minimus digitiser

Simple installation with a single M8 fixing bolt; robust and waterproof

No sensor levelling required

Isolated power supply for 10 - 36 V operation

Acceleration offsets adjustable for <1 mV precision

The hard anodised aluminium casing protects the instrument from water, allowing it to be deployed in a range of environments.

Posthole Deployment

For subterranean deployments, the Fortis^{PH} instrument incorporates the Fortis sensor housed in a stainless steel enclosure with a 100 bar / 10 MPa waterproof connector and an optional lifting bail.


Require a digital accelerometer?

The Fortimus combines the Fortis sensor with the feature-rich Minimus digitiser in one compact unit. Simple to use and quick to install, the Fortimus offers advanced data recording and communications features plus an ultra-low-latency mode for earthquake early warning. Find out more on our website:

www.guralp.com/products/instruments/guralp-fortimus

Applications

- > Earthquake Early Warning systems
- > Structural Health Monitoring (e.g. dams, industry, buildings)
- > Surface and vault installation
- > Posthole deployment
- > Networked Arrays

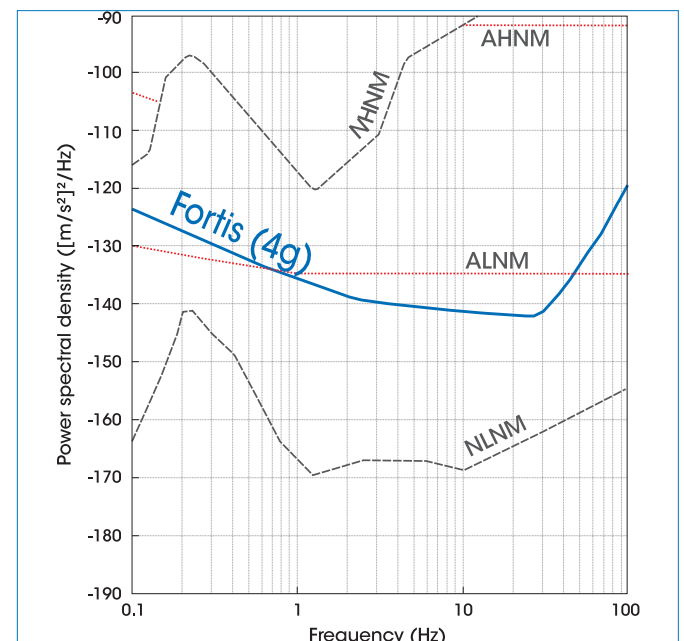

Self noise plot for the Fortis with a gain of 4g

SPECIFICATIONS

SYSTEM	
Configuration / Topology	Triaxial orthogonal
PERFORMANCE	
Acceleration output band	DC – 100 Hz standard
Gain switch options	4 g, 2 g, 1 g or 0.5 g
Sensitivity	2.5 V/g, 5 V/g, 10 V/g, 25 V/g
Peak / Full scale output	Differential: ± 20 V (40 V peak-to-peak) Single-ended (e.g. mass positions): ± 10 V (20 V peak-to-peak)
Clip level	4.2 g
Sensor Dynamic Range	> 160 dB
Self-noise below NHNM	> 0.07 Hz (14 seconds)
Self-noise below AHNM	DC to 100 Hz
Self-noise below ALNM	0.8 to 45 Hz
Cross axis rejection	0.001 g/g
Linearity	0.1% full scale
Lowest spurious resonance	> 450 Hz
Offset zeroing	Automatic on start up and on user command
Calibration controls	Independent signal & enable lines exposed on sensor connector
MASS / MONITORING CONTROL	
Sensor Mass positions	Three independent sensor mass position outputs (single ended)
POWER	
Power voltage range	10– 36V DC*
Power consumption (at 12 V DC)	1.5 W
*Power voltage for operation of this unit only. Connection to additional instrumentation or use of longer cables may result in a higher input voltage requirement	
ENVIRONMENTAL	
Operating temperature	-20 to +70 °C

PHYSICAL	
Standard Fortis:	
Diameter	125 mm
Height with feet and ports	99 mm
Height (sensor only)	66 mm
Enclosure/Materials	Hard anodised aluminium
Weight	1.1 kg
Communication / Connector	Military specification cconnector
Optional fixing	M8x75 fixing bolt
Environmental protection	IP68 - protection against effects of prolonged immersion at 3 m depth for 72 hours
Posthole Fortis:	
Diameter	125 mm
Height (exc. connector)	78 mm
Enclosure/Materials	Stainless steel
Communication / Connector	100 bar / 10 MPa waterproof connector (height 32 mm)
Optional lifting bail assembly (height)	259 mm
Environmental protection (IP rating)	IP68 - protection against effects of permanent immersion under pressure to 350 m depth